

TeltoCharge



THE FUTURE OF CHARGING ON YOUR WALL


Easy, smart and reliable EV charger that you can customize to your needs.
We offer an exceptional product that combines functionality, premium looks,
high-quality build and smart EV charging features to save you time and money.

TECHNICAL DATASHEET

A



DIMENSIONS



COLOR OPTIONS



FRONT PLATE FINISH



B



OUTPUT OPTIONS



CONNECTIVITY TYPES



KEY BENEFITS



POWERFUL

Up to 7,4 kW of charging capacity, allowing you to quickly charge your EV.



CONNECTED

Connect TeltoCharge to 3rd party OCPP Cloud platform via Wi-Fi/LAN/GSM. Or manage it with mobile device via Bluetooth.



COMPATIBLE

It is compatible with every electric vehicle and Plug-in (PHEV) hybrid now and in the future.



SECURE

Quick and easy EV charging authorization with NFC card or application, to prevent unwanted use.



CONVENIENT

Dynamic LED lights showing charging status, authentication and more.



RELIABLE

TeltoCharge is IP55 and IK10 rated, meaning that it can withstand even the harshest outdoors weather.

DETAILED SPECIFICATIONS



CONNECTION POINT

- A** Tethered cable with Type 2 outlet (IEC 62196-2)
- B** Type 2 socket (IEC 62196-2)



CERTIFICATIONS

CE & UKCA compliant
 Codes and standards:
 EMC: 2014/53/EU, IEC 61851-21;
 Safety: IEC/EN 61851-1;
 Environment: 2011/65/EU, REACH, RoHS



WARRANTY

36 months



DEVICE CONNECTIVITY

WiFi 2.4 GHz b/g/n connection	Yes
Bluetooth low energy	Yes
Local management via APP	Yes
NFC reader	Yes
OCPP 1.6	Yes
Ethernet (RJ45)	Yes
4G/LTE (CAT1), 3G, 2G (optional)	Yes



PROTECTION

In-built PEN fault protection	Yes
Output voltage and current monitoring	Yes
Temperature monitoring	Yes
Input voltage monitoring	Yes
RDC-DD (6 mA DC) Standard: IEC62955:2018	Yes*
Ground fault detection	Yes
Degree of protection	IP55
Impact resistant	IK10
Fire class	UL94



TETHERED CABLE

Flame retardant rating	UL-94V-0
Operating temperature	-30°C - +50°C
Plug and play count	10000
Cable length	5 m
IP rating	IP54
Socket	Type 2



CHARGING SPECIFICATION

Up to 7.4kW at 32A 1 phase
 Dynamic configuration



NETWORK TYPE

T/N and IT/TT



VOLTAGE

Single phase: 230 V (±10%)



MAIN FREQUENCY

50/60 Hz



OPERATING SPECIFICATIONS

Humidity to 95% RH non condensing;
 -30°C - +50°C
 Storage temperature -30°C - +60°C



TEMPERATURE SENSORS

In all main components



LED LIGHTS

LEDs showing the status of the charger



BUILT-IN ENERGY METER

Statistical data tracking Yes







LOAD BALANCING

Solar energy support	Yes
Static load balancing	Yes
Dynamic load balancing	Yes
Options to enable it:	
<ul style="list-style-type: none"> > CT clamps (included as standard); > Smart Energy meter (not included into the package) 	



*External RCD Type A required

TELTOCHARGE PRODUCT CODES


PRODUCT GROUP	PRODUCT CODE	FRONT PANEL COLOR	CHARGING CAPACITY	OUTPUT	MODEM
EVC160	EVC1603P4001	Slate grey	7.4kW	 type 2 socket	Quectel EG91-EX modem
	EVC1602P4001	Slate grey	7.4kW	 type 2 socket	-
EVC161	EVC1612P1001	Slate grey	7.4kW	 type 2 cable (5m)	-
	EVC1613P1001	Slate grey	7.4kW	 type 2 cable (5m)	Quectel EG91-EX modem



TELTONIKA ENERGY APP

Manage all your device settings from your mobile phone or tablet through the Teltonika Energy application.

- > Pair your EV charger with your phone through smart Teltonika Energy application via Bluetooth Low Energy connection.
- > Set up your device and get access to your consumption.
- > Monitor the status of your charger.
- > Schedule charging when the power is cheapest.
- > View your statistics in real time.
- > Set the charging current according to your needs.
- > Lock your charger to protect it from unwanted users and more.

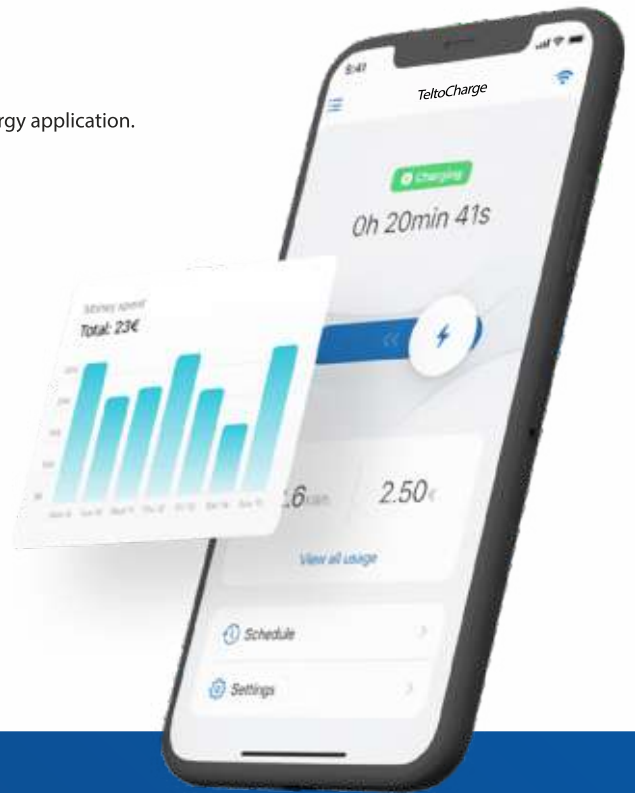

Compatible with your device



TeltoCharge



 **TELTONIKA** | Energy

**OPTIMAL
POWER**

Dualline Limited T/A Optimal Power / Partner

109 High Street
Invergordon
Ross-Shire
IV18 0AB

Tel. 01349888866
Email: info@optimalpower.co.uk
www.optimalpower.co.uk